


Datasheet

# COMpact 2BRI Module

Expansion module for COMpact systems with two variable ISDN ports (external/internal)

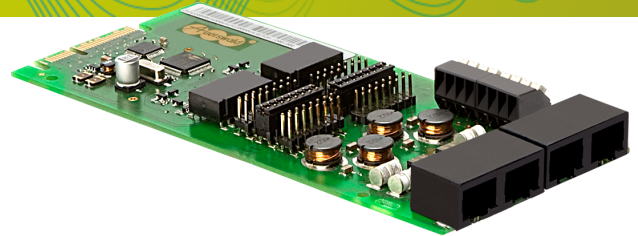

- 2 ISDN ports, switchable external ( $S_0$ ) – internal ( $S_0/U_{P0}$ )
- Internal either as  $S_0$  (4-wire) or  $U_{P0}$  port (2-wire), point-to-multipoint, Euro ISDN (DSS-1)
- System telephony function in conjunction with COMfortel® 1200, 1400, 1600 and 2600

## Your advantages in detail

The COMpact 2BRI Module the ITC systems COMpact 4000, 5000/5000R, 5200/5000R und 5500R by two switchable ISDN ports. Both ports can be configured as external or internal ISDN ports. In internal operation

mode  $S_0$  (4-wire) or  $U_{P0}$  (2-wire) can be selected. ISDN system telephones from the COMfortel series and normal ISDN terminals can be operated on the internal ISDN ports.

do you speak  
**FONtevo**®

# Features at a glance

## MODULE CONNECTION OPTIONS

- 2 ISDN ports, switchable external (S<sub>0</sub>) – internal (S<sub>0</sub>/U<sub>P0</sub>)

## MODULE FUNCTIONS

- Internal alternatively as S<sub>0</sub> (4-wire) or U<sub>P0</sub> port (2-wire), point-to-multipoint, Euro-ISDN (DSS-1)
- System telephony function in connection with COMfortel 1200, 1400, 1600 and 2600

## COMPATIBLE PRODUCTS

- 16118 / COMpact 4000
- 16119 / COMpact 4000 UK

- 16334 / COMpact 5200
- 16335 / COMpact 5200R
- 16336 / COMpact 5500R
- 16339 / COMpact 5500R UK

## TECHNICAL SPECIFICATIONS

- Trunk line: 0-1 S<sub>0</sub> port, Euro-ISDN (DSS-1), Point-to-Multipoint or Point-to-Point supported
- Internal ISDN port: 0-1 S<sub>0</sub>/U<sub>P0</sub> port, Euro-ISDN (DSS-1), Point-to-Multipoint supported

## DELIVERY

- COMpact 2BRI Module

## ORDERING INFORMATION

Designation: COMpact 2BRI Module

Article number: 16131

EAN Code: 4019377161319